

## Cable Glands & Accessories

WITH WIDE CLAMPING RANGE

- Nickel Plated Brass
- Polyamide



**SIMPLY SOLUTIONS**



## Organisation

Trinity Touch is a leading product manufacturer and solutions provider for Industrial Electrical applications. We supply our high quality products and solutions to various industries such as Panel Builders, Machine Builders, Renewable Energy & Telecom to name a few.

Trinity Touch has three Business Areas that have become technology or market leading in their respective areas of application:

- **Cabinet Plus** - for Electrical & Electronic Components.
- **Solutions** - Solar Solutions, Wind Solutions, Telecom Solutions etc.
- **EV Solutions** - Electric Vehicle Components & Charging Infrastructures.

We have a national and global presence to service the needs and requirements of our customers and are exporting our products to over 20 countries. We have a production capability of 10+ production principles including- extrusion, molding, stamping, plating etc.

### Solutions

Trinity Touch provides market leading electrical solutions for various applications. We have technology and market leading solutions for industries such as Solar, Wind, Railways, Telecom and EV Solutions. In the Solar Industry, we have supplied over 80 GWp worth of solutions worldwide. More recently we have launched a range of completely indigenised Charging Cables. Trinity Touch has been working with Electric Vehicles since 2018 with an aim of addressing the growing environmental concerns.

### Products

Trinity Touch focuses on manufacturing various items used in control cabinet industry. Trinity Touch is one of the leading manufacturers of industrial grade Enclosures, Cable Glands, Wiring Ducts, DIN Rails, Solderless Terminals Interface Modules and Timers to name just a few in the control cabinet industry. We have many prestigious clients for these products including leading System Integrators, Panel Builders, Machine Builders and Industrial Corporations globally.

### Approvals



# CABLE GLANDS & ACCESSORIES - NICKEL PLATED BRASS



## Key Features

- Complete range of sizes.
- Wide sealing and clamping range.
- Easy to install.
- Integrated anchorage.
- Metric and Pg thread available.




## Cable Glands - Nickel Plated Brass


### Metric Thread

#### Properties

Dome Nut	Nickel Plated Brass
Gland Body	Nickel Plated Brass
Sealing Ring	Nitrile Rubber (NBR)
Flat / O Ring	Nitrile Rubber (NBR)
Temperature Range	-40°C / +100°C

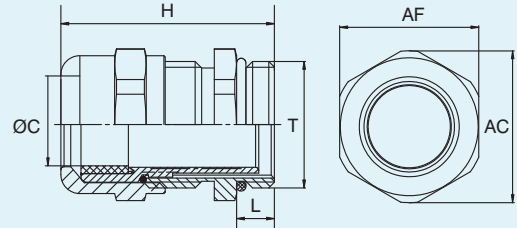

#### Technical Data

Connecting Thread	Metric as per EN 60423	Pitch	1.5 mm
Protection Grade	IP 68	UL File No.	E466603
Test Standard	UL 514B & BSEN 62444	Approvals	


Standard Thread			Long Thread			Hexagonal Dimensions				
Article No.	Entry Thread Length L(mm)	Height H(mm)	Article No.	Entry Thread Length L(mm)	Height H(mm)	External Thread (T)	Clamping Range ØC(mm)	Packet Size (Pcs.)	Across Flats AF(mm)	Across Corners AC(mm)
01 17 11001	5	25	01 17 11009	10	30	M 12	3 - 6	25	14	15.5
01 17 11002	5	30	01 17 11010	10	35	M 16	5 - 9	25	18	20
01 17 11003	6	33.5	01 17 11011	10	37.5	M 20	9 - 13	25	22	24
01 17 11004	7	36.5	01 17 11012	11	40.5	M 25	11 - 16	25	27	30
01 17 11005	8	38	01 17 11013	13	43	M 32	14 - 21	25	34	36
01 17 11006	8	41	01 17 11014	13	46	M 40	19 - 27	5	43	46
01 17 11007	9	49.5	01 17 11015	14	54.5	M 50	24 - 35	5	55	60
01 17 11008	10	52.5	01 17 11016	14	56.5	M 63	32 - 42	2	65	70

### Pg Thread

#### Properties

Dome Nut	Nickel Plated Brass
Gland Body	Nickel Plated Brass
Sealing Ring	Nitrile Rubber (NBR)
Flat / O Ring	Nitrile Rubber (NBR)
Temperature Range	-40°C / +100°C

#### Technical Data

Connecting Thread	Pg as per DIN 40430
Approvals	

Standard Thread			Long Thread			Hexagonal Dimensions				
Article No.	Entry Thread Length L(mm)	Height H(mm)	Article No.	Entry Thread Length L(mm)	Height H(mm)	External Thread (T)	Clamping Range ØC(mm)	Packet Size (Pcs.)	Across Flats AF(mm)	Across Corners AC(mm)
01 17 11119	5	24	01 17 11122	15	24	Pg 7	3 - 6.5	25	14	15.5
01 17 11087	6	29	01 17 11123	15	29	Pg 9	4 - 8	25	17	19
01 17 11088	6	29.5	01 17 11124	15	29.5	Pg 11	5 - 10	25	20	22
01 17 11089	6.5	31.5	01 17 11125	15	31.5	Pg 13.5	6 - 12	25	22	24.3
01 17 11090	6.5	31.5	01 17 11126	15	31.5	Pg 16	10 - 14	25	24	26.5
01 17 11091	7	34	01 17 11127	15	34	Pg 21	13 - 18	25	30	33.4
01 17 11092	8	39	01 17 11128	15	39	Pg 29	18 - 25	5	40	43.4
01 17 11093	10	44	01 17 11129	15		Pg 36	24 - 32	5	50	50
01 17 11120	12	48	01 17 11130	15		Pg 42	30 - 38	5	57	57
01 17 11121	14	51.5	01 17 11131	15		Pg 48	34 - 44	2	64	64


## Cable Glands - Nickel Plated Brass

### EMC

(With Electromagnetic Compatibility for Shielded Cables)

#### Properties

Dome Nut	Nickel Plated Brass
Gland Body	Nickel Plated Brass
Sealing Ring	Nitrile Rubber (NBR)
Flat / O Ring	Nitrile Rubber (NBR)
Temperature Range	-40°C / +100°C

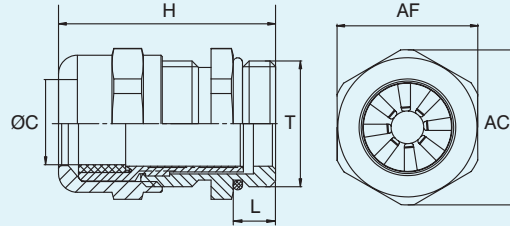

#### Technical Data

Connecting Thread	Metric as per EN 60423	Pitch	1.5 mm
Protection Grade	IP 68	UL File No.	E466603
Test Standard	UL 514B	Approvals	

Standard Thread			Long Thread			Hexagonal Dimensions				
Article No.	Entry Thread Length L(mm)	Height H(mm)	Article No.	Entry Thread Length L(mm)	Height H(mm)	External Thread (T)	Clamping Range ØC(mm)	Packet Size (Pcs.)	Across Flats AF(mm)	Across Corners AC(mm)
01 17 11017	5	25	01 17 11025	10	30	M 12	3 - 6	25	14	15.5
01 17 11018	5	30	01 17 11026	10	35	M 16	5 - 9	25	18	20
01 17 11019	6	33.5	01 17 11027	10	37.5	M 20	9 - 13	25	22	24
01 17 11020	7	36.5	01 17 11028	11	40.5	M 25	11 - 16	25	27	30
01 17 11021	8	38	01 17 11029	13	43	M 32	14 - 21	25	34	36
01 17 11022	8	41	01 17 11030	13	46	M 40	19 - 27	5	43	47.5
01 17 11023	9	49.5	01 17 11031	14	54.5	M 50	24 - 35	5	55	60
01 17 11024	10	52.5	01 17 11032	14	56.5	M 63	32 - 42	2	65	70

## Cable Glands - Combination Type

#### Properties

Dome Nut	Nickel Plated Brass
Gland Body	Nickel Plated Brass
Sealing Ring	Nitrile Rubber (NBR)
Flat / O Ring	Nitrile Rubber (NBR)
Temperature Range	-20°C / +100°C


#### Technical Data

Connecting Thread	Pg to Metric & Metric to Metric
Protection Grade	IP 68
Test Standard	UL 514B
UL File No.	E466603
Approvals	

Cable Glands - Combination Type						Hexagonal Dimensions
Article No.	Entry Thread Length L(mm)	Height H(mm)	External Thread / Entry Thread (T)	Clamping Range ØC(mm)	Packet Size (Pcs.)	Across Flat AF(mm)
01 17 11117	6	29	TTMMUL-11/16	5 - 10	100	20
01 17 11110	6.5	31.5	TTMMUL-16/12	5 - 8	100	18
01 17 11111	5	32.5	TTMMUL-20/16	9 - 12	50	22
01 17 11112	6	35.5	TTMMUL-25/20	11 - 16	50	27
01 17 11113	7	37	TTMMUL-32/25	14 - 21	25	34
01 17 11114	8	41	TTMMUL-40/32	19 - 27	10	43

## Hexagonal Locknuts

### Hexagonal Locknuts - Normal (Metric & Pg)



#### Properties

Dome Nut	Nickel Plated Brass
Temperature Range	Up to 100°C
Thread	Metric and Pg

#### Hexagonal Locknuts - Metric Thread


Article No.	External Thread (T)	Across Flats AF(mm)	Height H(mm)	Packet Size (Pcs.)
01 17 11094	M 12	15	2.8	100
01 17 11095	M 16	19	2.8	100
01 17 11096	M 20	24	3	50
01 17 11097	M 25	30	3.5	50
01 17 11098	M 32	36	4	25
01 17 11099	M 40	46	5	10
01 17 11100	M 50	60	5	5
01 17 11101	M 63	70	6	5

#### Hexagonal Locknuts - Pg Thread

Article No.	External Thread (T)	Across Flats AF(mm)	Height H(mm)	Packet Size (Pcs.)
01 17 11143	Pg 7	15	2.8	100
01 17 11102	Pg 9	18	2.8	100
01 17 11103	Pg 11	21	3	50
01 17 11104	Pg 13.5	23	3	50
01 17 11105	Pg 16	26	3	50
01 17 11106	Pg 21	32	3.5	50
01 17 11107	Pg 29	41	4	25
01 17 11108	Pg 36	51	5	10
01 17 11144	Pg 42	65	5	5
01 17 11145	Pg 48	69	5.5	5

## Hexagonal Locknuts

### Hexagonal Locknuts - EMC (metric)



#### Properties


Dome Nut	Nickel Plated Brass
Temperature Range	Up to 100°C
Thread	Metric

#### Hexagonal Locknuts - Metric Thread

Article No.	External Thread (T)	Thread Length L(mm)	Across Flats AF(mm)	Height H(mm)	Packet Size (Pcs.)
01 17 11134	M 12	4.5	15	5.5	100
01 17 11135	M 16	4.5	19	5.5	100
01 17 11136	M 20	4.5	24	5.5	50
01 17 11137	M 25	4.5	30	5.5	50
01 17 11138	M 32	4.5	36	5.5	25
01 17 11139	M 40	5	46	6	10
01 17 11181	M 50	5	60	6	5
01 17 11182	M 63	6	70	7	5

## Accessories

### Enlarger



#### Properties

Enlarger                      Nickel Plated Brass  
 Temperature Range      Up to +200°C


#### Technical Data

Enlarger of threaded or clearance holes to larger thread sizes.

#### Enlarger - Metric Thread

Article No.	External Thread (T)	Size (A)	Size (B)	Length L(mm)	Height H(mm)	Diameter D(mm)	Packet Size (Pcs.)
01 17 11146	12/16	12	16	5	16	8	100
01 17 11147	16/20	16	20	5	16.5	12	100
01 17 04457	20/25	20	25	6	18.5	15	100
01 17 04458	25/32	25	32	7	20.5	21	100
01 17 09285	32/40	32	40	8	23.5	36	50

### Reducer



#### Properties

Dome Nut                      Nickel Plated Brass  
 Temperature Range      up to +200°C

#### Technical Data

Reduction of threaded or clearance holes to smaller thread sizes.

#### Reducer - Metric Thread

Article No.	External Thread (T)	Size (A)	Size (B)	Length L(mm)	Height H(mm)	Diameter D(mm)	Packet Size (Pcs.)
01 17 05064	M 16/12	M 16	M 12	6	8.5	20	100
01 17 05065	M 20/16	M 20	M 16	6.5	9	24	100
01 17 05066	M 25/20	M 25	M 20	7	10	30	100
01 17 05067	M 32/25	M 32	M 25	8	11.5	39	100
01 17 05068	M 40/32	M 40	M 32	9	12.5	50	50

# CABLE GLANDS & ACCESSORIES - POLYAMIDE



## Key Features

- Complete range of sizes.
- Wide sealing and clamping range.
- Easy to install.
- Integrated anchorage.
- Metric and Pg thread available.
- Silver Grey, Light Grey and Black color.



## Cable Glands - Polyamide


### Metric Thread




#### Properties

Dome Nut	Polyamide PA6-V2
Gland Body	Polyamide PA6-V2
Flat / O Ring	Nitrile Rubber (NBR)
Sealing Ring	Nitrile Rubber (NBR)
Temperature Range	-40°C to +100°C

#### Technical Data

Connecting Thread	Metric as per EN 60423 Pg as per DIN 40430
Protection Grade	IP 68



Test Standard	UL 514 B & EN 62444
UL File No.	E 466603
Approvals	  

Silver Grey Color (RAL 7001)	Light Grey Color (RAL 7035)	Black Color (RAL 9005)	Hexagonal Dimensions						
Article No.	Article No.	Article No.	External Thread (T)	Clamping Range ØC(mm)	Entry Thread Length L(mm)	Height H(mm)	Packet Size (Pcs.)	Across Flats AF(mm)	Locknut N(mm)
01 17 11033	01 17 11041	01 17 11049	M 12	3 - 6	8	31	100	15	17
01 17 11034	01 17 11042	01 17 11050	M 16	5 - 10	8	35	100	20	22
01 17 11035	01 17 11043	01 17 11051	M 20	8 - 13	8	37	100	24	27
01 17 11036	01 17 11044	01 17 11052	M 25	11 - 17	10	44	50	29	32
01 17 11037	01 17 11045	01 17 11053	M 32	15 - 21	15	55	25	36	41
01 17 11038	01 17 11046	01 17 11054	M 40	19 - 28	15	58	15	46	50
01 17 11039	01 17 11047	01 17 11055	M 50	27 - 35	18	67	10	55	60
01 17 11040	01 17 11048	01 17 11056	M 63	32 - 42	18	71	6	68	75


### Pg Thread

Silver Grey Color (RAL 7001)	Light Grey Color (RAL 7035)	Black Color (RAL 9005)	Hexagonal Dimensions						
Article No.	Article No.	Article No.	External Thread (T)	Clamping Range ØC(mm)	Entry Thread Length L(mm)	Height H(mm)	Packet Size (Pcs.)	Across Flats AF(mm)	Locknut N(mm)
01 17 11057	01 17 11067	01 17 11077	Pg 7	3 - 6.5	8	31	100	15	19
01 17 11058	01 17 11068	01 17 11078	Pg 9	4 - 8	8	34	100	19	22
01 17 11059	01 17 11069	01 17 11079	Pg 11	5 - 10	8	37	100	22	24
01 17 11060	01 17 11070	01 17 11080	Pg 13.5	6 - 12	9	39	100	24	27
01 17 11061	01 17 11071	01 17 11081	Pg 16	10 - 14	10	42	50	27	30
01 17 11062	01 17 11072	01 17 11082	Pg 21	13 - 18	15	50	50	33	36
01 17 11063	01 17 11073	01 17 11083	Pg 29	18 - 25	15	56	25	42	46
01 17 11064	01 17 11074	01 17 11084	Pg 36	22 - 32	15	65	10	53	60
01 17 11065	01 17 11075	01 17 11085	Pg 42	30 - 38	18	70	8	60	65
01 17 11066	01 17 11076	01 17 11086	Pg 48	34 - 44	18	71	6	65	70

\* UL Applied

## Cable Glands - Polyamide

### Combination Type

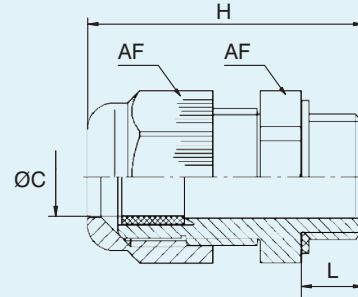

#### Properties

Dome Nut	Polyamide PA6-V2
Gland Body	Polyamide PA6-V2
Flat / O Ring	Nitrile Rubber (NBR)
Sealing Ring	Nitrile Rubber (NBR)
Temperature Range	-40°C to +100°C

#### Technical Data

Connecting Thread	Metric as per EN 60423
	Pg as per DIN 40430


#### Approvals



Cable Glands - Combination Type					Hexagonal Dimensions	
Article No.	External Thread / Entry Thread	Clamping Range ØC(mm)	Entry Thread Length L(mm)	Height H(mm)	Packet Size (Pcs.)	Across Flats AF(mm)
<b>Silver Grey Color</b>						
01 17 11149	TTPg11M16-Grey	5 - 10	15	44	100	22
01 17 11150	TTPg13M20-Grey	6 - 12	11	41.5	100	24
01 17 11151	TTPg16M20-Grey	10 - 14	15	47.5	50	27
01 17 11152	TTPg21M25-Grey	13 - 18	15	52	50	33
01 17 11153	TTPg29M32-Grey	18 - 25	15	57	25	42
01 17 11156	TTPg42M50-Grey	30 - 38	18	73.5	5	60
<b>White Color</b>						
01 17 11159	TTPg7M12-White	3 - 6.5	8	31	100	15
01 17 11160	TTPg11M16-White	5 - 10	15	44	100	22
01 17 11161	TTPg13M20-White	6 - 12	15	45	100	24
01 17 11162	TTPg16M20-White	10 - 14	15	47.5	100	27
01 17 11163	TTPg21M25-White	13 - 18	15	52	50	33
01 17 11164	TTPg29M32-White	18 - 25	15	57	25	42
01 17 11165	TTPg36M40-White	22 - 32	10	50	15	53
01 17 11166	TTPg36M40-L-White	22 - 32	18	66	15	53
01 17 11167	TTPg42M50-White	30 - 38	12	64	10	60
01 17 11168	TTPg42M50-L-White	30 - 38	18	70	10	60
01 17 11169	TTPg48M63-White	34 - 44	18	71	6	65
<b>Black Color</b>						
01 17 11170	TTPg7M12-Black	3 - 6.5	8	31	100	15
01 17 11171	TTPg11M16-Black	5 - 10	15	44	100	22
01 17 11172	TTPg13M20-Black	6 - 12	11	41.5	100	24
01 17 11173	TTPg16M20-Black	10 - 14	15	47.5	50	27
01 17 11174	TTPg21M25-Black	13 - 18	15	52	50	33
01 17 11175	TTPg29M32-Black	18 - 25	15	57	25	42
01 17 11178	TTPg42M50-Black	30 - 38	18	73.5	5	60

## Hexagonal Locknuts

### Hexagonal Locknuts - Normal ( Metric & Pg )



#### Properties

Dome Nut	Polyamide PA6-V2
Temperature Range	-20°C / +100°C
Thread	Metric and Pg
Color	RAL 7001, RAL 7035, RAL 9005

#### Hexagonal Locknut - Metric Thread


Article No.	Entry Thread / Color	Article No.	Entry Thread / Color	Article No.	Entry Thread / Color	Packet Size (Pcs.)
01 17 04373	M 12 PA 7001	01 17 04391	M 12 PA 7035	01 17 04359	M 12 PA 9005	200
01 17 04374	M 16 PA 7001	01 17 04392	M 16 PA 7035	01 17 04017	M 16 PA 9005	200
01 17 04375	M 20 PA 7001	01 17 04393	M 20 PA 7035	01 17 04018	M 20 PA 9005	200
01 17 04376	M 25 PA 7001	01 17 04394	M 25 PA 7035	01 17 04021	M 25 PA 9005	200
01 17 04377	M 32 PA 7001	01 17 04395	M 32 PA 7035	01 17 04022	M 32 PA 9005	100
01 17 04378	M 40 PA 7001	01 17 04396	M 40 PA 7035	01 17 04360	M 40 PA 9005	50
01 17 04379	M 50 PA 7001	01 17 04397	M 50 PA 7035	01 17 04361	M 50 PA 9005	50
01 17 04380	M 63 PA 7001	01 17 04398	M 63 PA 7035	01 17 04362	M 63 PA 9005	50

#### Hexagonal Locknut - Pg Thread

Article No.	Entry Thread / Color	Article No.	Entry Thread / Color	Article No.	Entry Thread / Color	Packet Size (Pcs.)
01 17 04363	Pg 7 PA 7001	01 17 04381	Pg 7 PA 7035	01 17 04353	Pg 7 PA 9005	200
01 17 04364	Pg 9 PA 7001	01 17 04382	Pg 9 PA 7035	01 17 04015	Pg 9 PA 9005	200
01 17 04365	Pg 11 PA 7001	01 17 04383	Pg 11 PA 7035	01 17 04016	Pg 11 PA 9005	200
01 17 04366	Pg 13.5 PA 7001	01 17 04384	Pg 13.5 PA 7035	01 17 04019	Pg 13.5 PA 9005	200
01 17 04367	Pg 16 PA 7001	01 17 04385	Pg 16 PA 7035	01 17 04020	Pg 16 PA 9005	200
01 17 04368	Pg 21 PA 7001	01 17 04386	Pg 21 PA 7035	01 17 04354	Pg 21 PA 9005	100
01 17 04369	Pg 29 PA 7001	01 17 04387	Pg 29 PA 7035	01 17 04355	Pg 29 PA 9005	100
01 17 04370	Pg 36 PA 7001	01 17 04388	Pg 36 PA 7035	01 17 04356	Pg 36 PA 9005	50
01 17 04371	Pg 42 PA 7001	01 17 04389	Pg 42 PA 7035	01 17 04357	Pg 42 PA 9005	50
01 17 04372	Pg 48 PA 7001	01 17 04390	Pg 48 PA 7035	01 17 04358	Pg 48 PA 9005	50

## Accessories

### Screw Plug



#### Properties

Material	Polyamide PA6 GF 30
Temperature Range	-30°C / +80°C
Protection Grade	IP 54
Color	RAL 7001, RAL 7035, RAL 9005

#### Technical Data

For secure sealing of unused threaded or clearance holes.

#### Screw Plug - Metric Thread


Article No.	External Thread (T)	Article No.	External Thread (T)	Thread Length L(mm)	Height H(mm)	Diameter D(mm)	Packet Size (Pcs.)
Silver Grey Color		Light Grey Color					
01 17 06616	M 12 PA 7001	01 17 06824	M 12 PA 7035	6	10	15	100
01 17 06614	M 16 PA 7001	01 17 06825	M 16 PA 7035	6	10.5	20	100
01 17 06615	M 20 PA 7001	01 17 06826	M 20 PA 7035	6	10.5	24	100
01 17 06622	M 25 PA 7001	01 17 06827	M 25 PA 7035	8	13	30	100
01 17 06623	M 32 PA 7001	01 17 06828	M 32 PA 7035	8	13.5	37	50
01 17 06625	M 40 PA 7001	01 17 06829	M 40 PA 7035	8	14	46	50
01 17 06626	M 50 PA 7001	01 17 06830	M 50 PA 7035	10	16.5	56	25

#### Screw Plug - Pg Thread

Article No.	External Thread (T)	Article No.	External Thread (T)	Thread Length L(mm)	Height H(mm)	Diameter D(mm)	Packet Size (Pcs.)
Silver Grey Color		Light Grey Color					
01 17 06617	Pg 7 PA 7001	01 17 06817	Pg 7 PA 7035	6	10	15	100
01 17 06613	Pg 9 PA 7001	01 17 06818	Pg 9 PA 7035	6	10	19	100
01 17 06618	Pg 11 PA 7001	01 17 06819	Pg 11 PA 7035	6	10	22	100
01 17 06619	Pg 13 PA 7001	01 17 06820	Pg 13 PA 7035	6	10	25	100
01 17 06620	Pg 16 PA 7001	01 17 06821	Pg 16 PA 7035	6	10	27	100
01 17 06621	Pg 21 PA 7001	01 17 06822	Pg 21 PA 7035	8	12.5	33	100
01 17 06624	Pg 29 PA 7001	01 17 06823	Pg 29 PA 7035	8	13	44.5	50
01 17 04306	Pg 36 PA 7001	01 09 00278	Pg 36 PA 7035	10	15	55.5	50


## Accessories

### Blanking Plug



Blanking Plug						
Article No.	Description	Size	Diameter D1(mm)	Diameter D2(mm)	Length L(mm)	Height H(mm)
01 17 05437	M12 BLANKING PLUG	M 12	10	5.5	9	12.5
01 17 05438	M16 BLANKING PLUG	M 16	13.5	9.5	12	16
01 17 05439	M20 BLANKING PLUG	M 20	16.5	12	12	16.5
01 17 05440	M25 BLANKING PLUG	M 25	20.5	16	15	19.5
01 17 05441	M32 BLANKING PLUG	M 32	24.5	20	17	21.5
01 17 05442	M40 BLANKING PLUG	M 40	32	27	20	24
01 17 05443	M50 BLANKING PLUG	M 50	39	35	25	29


### Dust Cap



Dust Cap				
Article No.	Description	Size	Height H(mm)	Diameter D(mm)
01 17 05776	DUST CAP M12	M 12	0.5	10
01 17 05777	DUST CAP M16	M 16	0.5	15.5
01 17 05778	DUST CAP M20	M 20	0.5	18.5
01 17 05779	DUST CAP M25	M 25	0.5	23
01 17 05780	DUST CAP M32	M 32	0.5	29
01 17 05781	DUST CAP M40	M 40	0.5	35
01 17 05782	DUST CAP M50	M 50	0.5	45
01 17 05783	DUST CAP M63	M 63	0.5	57


## Accessories

### Multiple Inserts



Multiple Inserts				
Article No.	Size	No. of Holes x Hole Size Nx D (mm)	Height H (mm)	Outside Diameter OD (mm)
039908188	PG 29	17.8 X 4	7.5	15.1
039908189	PG 16	5 X 2	9.3	19.8
039908233	PA-PG 29	7.8 X 5	12.5	25.1
039913391	M 20	4 X 2	12.5	25.1
039915041	PG 16	2 X 6	12.5	25.1
039915042	PG 29	2 X 7	15	32.3
039915043	PG 36	3 X 14.5	8.5	15.3
039915044	M 40	2 X 14.5	8.5	15.3
039910601	M 32	3 X 8	9	17.4
039908002	M 25-27.5/5.5	27.5/5.5	11	22.2


## Application Area




Automobiles




Telecommunication




Solar Energy



Wind Energy




Transportation



Machine Manufacturers

## OTHER PRODUCT PROGRAMS

**TRIBOX®**  
Thermoplastic  
Enclosures

**TRIBOX®**  
Customised Solutions

**TRISOLAR®**


**TRIFLEX®**  
Flexible Conduits

**DIN Rails**

**Wiring Ducts**  
Wire Management Solutions  
PVC & Halogen Free

**Solderless Terminals**

**Analog Timers & Digital Timers**

**Interface Modules**


### Trinity Touch Pvt. Ltd.

[www.trinitytouch.com](http://www.trinitytouch.com)
**INDIA**
**Delhi: Corporate Office**

D-10, Defence Colony, New Delhi 110024, INDIA  
Tel: +91.11.71200900 | E-mail: [postmaster@trinitytouch.com](mailto:postmaster@trinitytouch.com)

**Ahmedabad**

Sun west Bank – A wing - 10th floor - 1012A- Ashram road near River front ,  
Vallabh sadan (haveli), Ahmedabad 380015, INDIA

**Kolkata**

Srijan Corporate Park, Tower – 2, 6th Floor, Unit no. 606, Plot no. 2, Block  
EP & GP, Sector –V, Saltlake Electronic Complex, Kolkata 700091, INDIA  
Tel: +91-80-46231200

**Pune**

Office No: C1, Vascon Eco Tower, Baner-Pashan Link Road, Baner, Pune 411045 INDIA  
Tel: +91.20.67170600

**Mumbai**

C-413, Rupa Solitaire, Millennium business park, Mahape, Navi Mumbai 400710 INDIA  
Tel: +91-20-67170600

**Chennai**

Flat No. 42, Apartment "Krishna" 59(39), 4TH Floor, 1st Avenue,  
100 Feet Road, Ashok Nagar Chennai 600083, Tamil Nadu  
Tel: +91-80-46231200

**Bengaluru**

2nd Floor, Umitya Land Mark 10/7, Lavelle Road, Bengaluru 560001, INDIA  
Tel: +91.80.46231200

**Works & Warehouse**

Prithla-Dudhola road, Dudhola Distt. Palwal, Haryana 121102, INDIA  
Tel: +91.1275.711500 E-mail: [sales@trinitytouch.com](mailto:sales@trinitytouch.com)



### Trinity Touch (EUROPE) Ltd.

[www.trinitytouch.co.uk](http://www.trinitytouch.co.uk)
**UK**

Unit-L, Tyson Courtyard, Weldon South  
Industrial Estate, Corby, Northants, NN18 8AZ, UK  
Tel: +44 (0) 1536 400 641  
E-mail: [gbsales@trinitytouch.com](mailto:gbsales@trinitytouch.com)

### Trinity Touch- FZCO, UAE

**UAE**

Building 8W, Block A, Level 5 , Off.No. 535  
Dubai Airport Freezone, Dubai, UAE

### Trinity Touch Pvt. Ltd.

**AUSTRALIA**

Level 11, 66 Clarence Street, Sydney NSW 2000, Australia  
Tel: +61 414 437 829

Distributed by :

